

RAINCLAD

Installation Guide

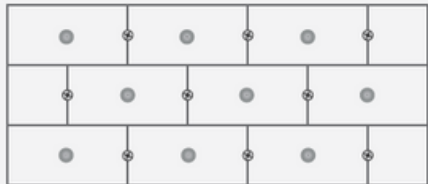


Figure 1

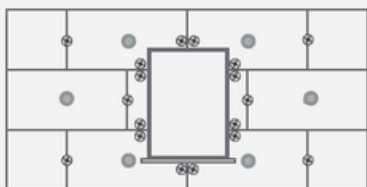


Figure 2

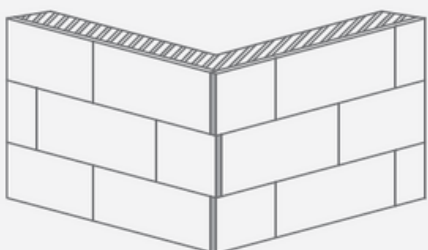


Figure 3

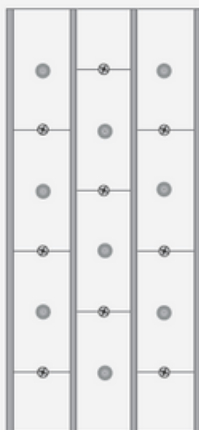


Figure 4

External Wall Insulation

- Use metal fixings in the middle of the slabs.
- Polypropylene fixings can be used on the junctions. (Figure 1)
- Fixings should have a minimum head diameter of 60mm.
- Slabs should be used one piece on the corners of the doors and windows.
- Use more fixings on the corners close to junctions. (Figure 2)
- Slabs should overlap on the corners of the building. (Figure 3)
- Textured side of the slabs should face outward.
- The vertical joints of the slabs should not be aligned when used as external wall insulation.
- There should be no gap between the slabs.
- See page 12 and 13 for typical U-Values relating different wall installations.



Cladding Systems

- Stagger horizontal joints on cladding systems. (Figure 4)
- Allow min. 25mm ventilated cavity behind the cladding boards.
- Fixings should have a minimum head diameter of 60mm.
- Use metal fixings in the middle of the slabs. Polypropylene fixings can be used on the junctions. (Figure 4)
- Textured side of the slabs should face outward.
- There should be no gap between the slabs.
- See page 12 and 13 for typical U-Values relating different wall installations.

KEY



Centre (stainless steel)



Perimeter (high grade plastic)

DISCLAIMER

The information given in this brochure is believed to be accurate at the time of publication, therefore Terra Building Materials LTD. does not accept legal responsibility for the contents of this catalogue. Unless otherwise specifically stated, product specifications mentioned in this brochure were current at the time of writing and are subject to change without notice by the manufacturers or distributors. Terra Building Materials LTD. does not accept legal responsibility for consequences of applying the product different than described within this brochure. Any dissemination, distribution, copying or use of this catalogue is strictly prohibited. All rights reserved in this catalogue cannot be replicated or used without Terra Building Materials LTD.'s consent. Before you print think about the ENVIRONMENT.

